

Straight Shank Jobber Drills


Code
112

M
INCH
DIN 338
HSS Co5

TYPE N



GOLD OXIDE

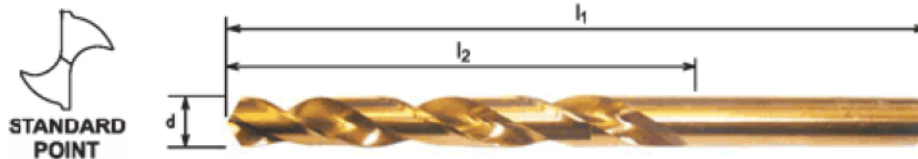

d		l ₂	l ₁	Code	d		l ₂	l ₁	Code
mm	inch				mm	inch			
1.5	1/16	18	40	1120150	4.366	11/64	47	80	1120437
1.588		20	43	1120159	4.4		47	80	1120440
1.6		20	43	1120160	4.5		47	80	1120450
1.7		20	43	1120170	4.6		47	80	1120460
1.8	5/64	22	46	1120180	4.7	3/16	47	90	1120470
1.9		22	46	1120190	4.762		52	86	1120476
1.984		24	49	1120198	4.8		52	86	1120480
2		24	49	1120200	4.9		52	86	1120490
2.1	3/32	24	49	1120210	5	13/64	52	86	1120500
2.2		27	53	1120220	5.1		52	86	1120510
2.3		27	53	1120230	5.159		52	86	1120516
2.381		30	57	1120238	5.2		52	86	1120520
2.4	7/64	30	57	1120240	5.3	7/32	52	86	1120530
2.5		30	57	1120250	5.4		57	93	1120540
2.6		30	57	1120260	5.5		57	93	1120550
2.7		33	61	1120270	5.556		57	93	1120556
2.778	1/8	33	61	1120278	5.6	15/64	57	93	1120560
2.8		33	61	1120280	5.7		57	93	1120570
2.9		33	61	1120290	5.8		57	93	1120580
3		33	61	1120300	5.9		57	93	1120590
3.1	9/64	36	65	1120310	5.953	1/4	57	93	1120595
3.178		36	65	1120318	6		57	93	1120600
3.2		36	65	1120320	6.1		63	101	1120610
3.3		36	65	1120330	6.2		63	101	1120620
3.4	5/32	39	70	1120340	6.3	17/64	63	101	1120630
3.5		39	70	1120350	6.350		63	101	1120635
3.572		39	70	1120357	6.4		63	101	1120640
3.6		39	70	1120360	6.5		63	101	1120650
3.7	9/32	39	70	1120370	6.6	9/32	63	101	1120660
3.8		43	75	1120380	6.7		63	101	1120670
3.9		43	75	1120390	6.747		69	109	1120675
3.969		43	75	1120397	6.8		69	109	1120680
4	1/2	43	75	1120400	6.9	1/2	69	109	1120690
4.1		43	75	1120410	7		69	109	1120700
4.2		43	75	1120420	7.1		69	109	1120710
4.3		47	80	1120430	7.144		69	109	1120714